

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

---

***Device Specifications:***

Device Type: Video Projector  
Manufacturer: ViewSonic  
Firmware Version: N/A  
Model(s): PJ560D, PJ559D

***Version History:***

Driver Version	Date	IP Link Compiler	GC2 Version	Notes
1	03/30/09	1.3.11.1	2.5.0	Added support for ViewSonic PJ559D model. Beta version.
1	07/28/08	1.3.11.1	2.4.1	Initial beta version.

***Driver Notes:***

Driver does not support status.

**Control Commands & States:**

<b>Aspect Ratio</b>	Toggle		
<b>Audio Mute</b>	Off/On		
<b>Input</b>	RGB 1	RGB 2	Component
	S-Video	Video	HDTV
<b>Lamp Mode</b>	Eco                      Normal		
<b>Power</b>	On                      Off		
<b>Video Mute</b>	Off/On		
<b>Volume</b>	Up                      Down		

**Status Available:**

None

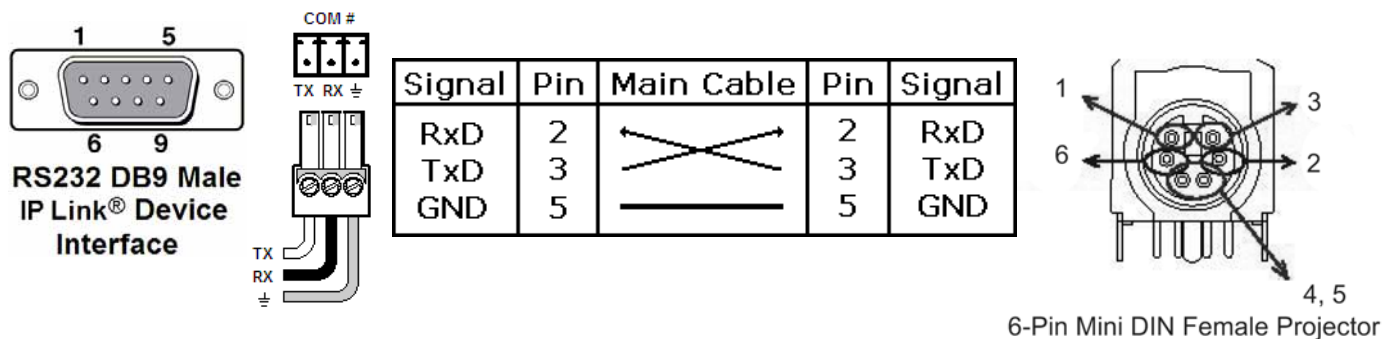
**Cable and Adapter Requirements:**

M/F RS-232 Straight Serial Cable (Extron Electronics P/N 26-433-XX)  
Serial to 6-Pin Mini DIN Adapter

**Notes for the Device:****Serial communication:**

**Port Type:** RS232  
**Baud Rate:** 19200  
**Data Bits:** 8

**Parity:** None  
**Stop Bits:** 1  
**Flow Control:** None

**Pin Assignments Diagram:**

Note: Captive screw connector may also be used as a serial connection.

**General Notes:**